




Product NO.		104-12-10002-150			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	FIRST ISSUE	YYX	2024.08.13	Gavin	

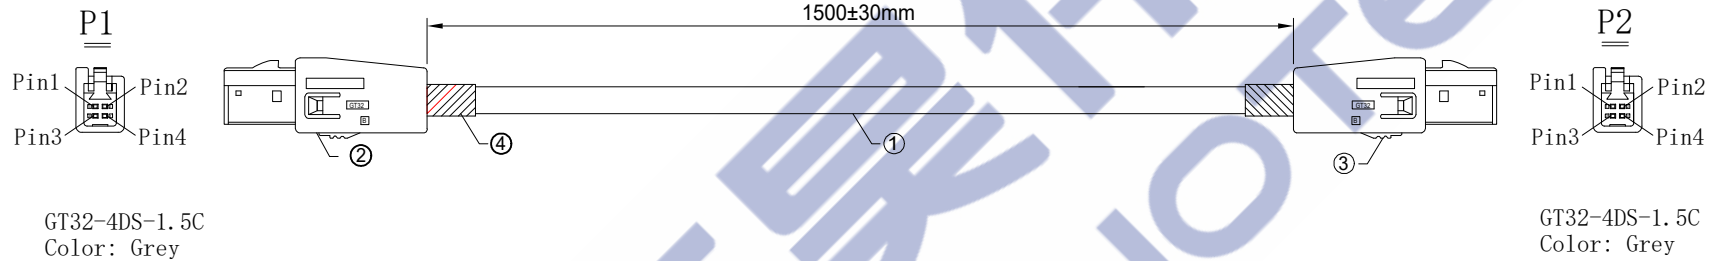

WIRINGSCHEDULE			
P1	Color	P2	
Pin1	Black	Pin1	
Pin2	Red	Pin2	
Pin3	White	Pin3	
Pin4	Green	Pin4	
Shell	GND	Shell	

Test Conditions:
 1. 100% conduction, no short circuit, open circuit, instantaneous interruption and dislocation phenomenon;
 2. Test voltage: DC 300V;
 3. Insulation resistance: 10M Ω;
 4. On-resistance: 2Ω;
 5. Product service temperature: - 40° C ~ +150 ° C

4	Heat shrink tube	SIZE:06.0mm, L=20mm, COLOR:BLACK UL	2PCS
3	Connector P2	GT32-4DS-1.5C ; Brass, Shell:Grey	1PCS
2	Connector P1	GT32-4DS-1.5C ; Brass, Shell:Grey	1PCS
1	Cable	7/0.16TC*1.2*4C+MY+AL+128/0.1TC)*4.6 45P Black	1500mm
NO	PartName	Specifications	Q' ty

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTEC GROUP				
		PART DESCRIPTION: GT32-4DS Female to GT32-4DS female cable				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		Appd: Gavin	P/N: 104-12-10002-150			
0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm		Check:	Date	Scale	Unit	Type
		Draw: YYX	2024.08.13	Free	MM	Z
						Page
						1/1