




| | | | | |
|-------------|-------------|------------------|------------|----------|
| Product NO. | | 104-12-10010-050 | | |
| REV | DESCRIPTION | DWN | DATE | APPROVEN |
| R1.0 | FIRST ISSUE | YYX | 2024.08.14 | Gavin |

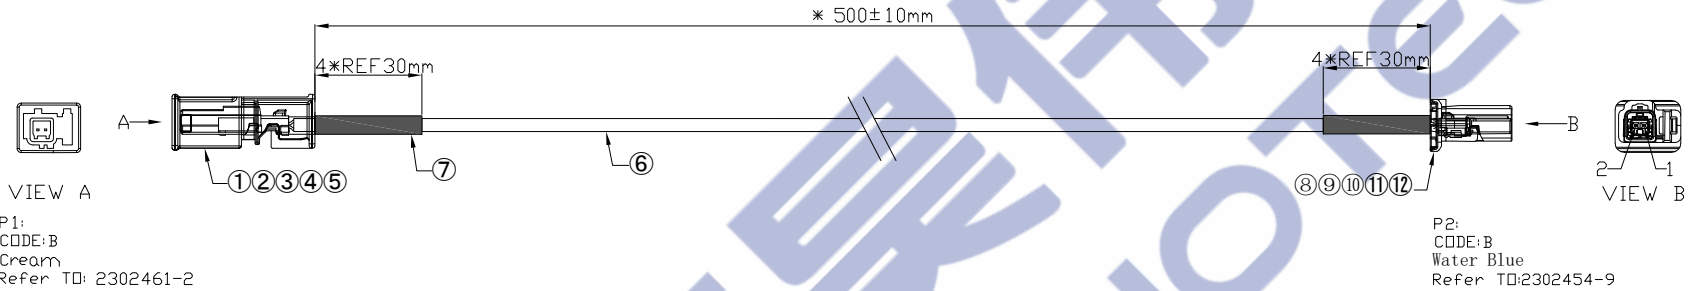

| P1: | | PIN OUT | | WIRE COLOR | | P2: | |
|-------|---|---------|---|------------|-------|-----|---|
| 1 | 2 | 1 | 2 | WHITE | GREEN | 1 | 2 |
| Shell | | Shell | | | | | |

- Note:
- Mark "@" indicates key inspection dimensions
 - The product must be subject to 100% electrical test. Test conditions:
 - open circuit and short circuit;
 - insulation impedance: 100M Ω min;
 - conduction impedance: 5 Ω max;
 - high voltage test: 500V / DC 0.1s;
 - Product service temperature: - 40°C ~ +221 °C

| NO | PART NAME | DESCRIPTION | QTY |
|----|----------------------|--|-----|
| 12 | Shield ring | Refer TO:2141380-2 | 1 |
| 11 | Pin | Refer TO:1-1703930-1, Brass, Tinned | 2 |
| 10 | Shell | Refer TO:2302454-9, Z Code, Color: water blue | 1 |
| 9 | Metal iron shell | Refer TO:2302452-1 | 1 |
| 8 | Insulator | Refer TO:2302450-1, Color: Black | 1 |
| 7 | Heat-shrinkable tube | Black, L=REF30mm | 2 |
| 6 | Cable | 7 * 0.154 26 * 2C+AB OD: 3.7mm jacket: PVC black Text content: GG 2Speed (R) core wire gauge: 26AWG | 1 |
| 5 | Shield ring | Refer TO:2302461-2 | 1 |
| 4 | Pin | Refer TO:2302461-2, Brass, Tinned | 2 |
| 3 | Shell | Refer TO:2302461-2, B Code, Color: Cream | 1 |
| 2 | Metal iron shell | | 1 |
| 1 | Insulator | Refer TO:2302461-2, Color: Cream | 1 |

| | | |
|--|--|-----------------------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | RENHOTEC GROUP | |
| | PART DESCRIPTION: 2302510-9 female 2302461-2 male cable ,0.5M | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: | Appd: Gavin | P/N: 104-12-10010-050 |
| 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm | Check: | Date: 2024.08.14 |
| | Draw: YYX | Scale: Free |
| | | Unit: MM |
| | | Type: Z |
| | | Page: 1/1 |