



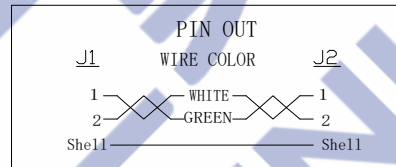

Product NO.		104-12-10011-150		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	FIRST ISSUE	YYX	2024.08.13	Gavin

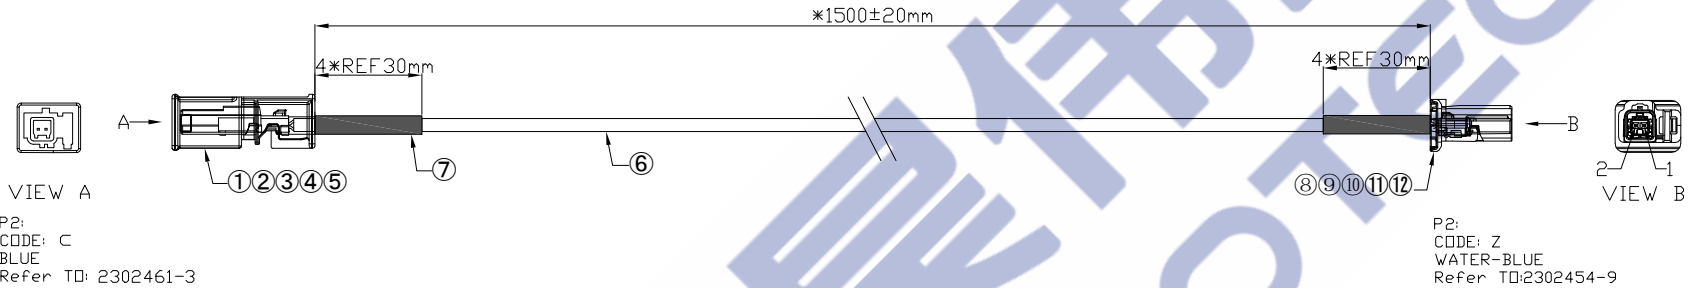

- Note:
1. Mark "@" indicates key inspection dimensions
 2. The product must be subject to 100% electrical test. Test conditions:
 - 2.1 open circuit and short circuit;
 - 2.2 insulation impedance: 100M Ω min;
 - 2.3 conduction impedance: 5 Ω max;
 - 2.4 high voltage test: 500V / DC 0.1s;
 3. Product service temperature: - 40°C ~ +221 °C

12	Shield ring	Refer TO:2141380-2	1
11	Pin	Refer TO:1-1703930-1, Brass, Tinned	2
10	Shell	Refer TO:2302454-9, Z Code, Color: water blue	1
9	Metal iron shell	Refer TO:2302452-1	1
8	Insulator	Refer TO:2302450-1, Color: Black	1
7	Heat-shrinkable tube	Black, L=REF30mm	2
6	Cable	7 * 0.154 26 * 2C+AB OD: 3.7mm jacket: PVC black Text content: GG 2Speed (R) core wire gauge: 26AWG	1
5	Shield ring	Refer TO:2302461-3	1
4	Pin	Refer TO:2302461-3, Brass, Tinned	2
3	Shell	Refer TO:2302461-3, c Code, Color: Blue	1
2	Metal iron shell		1
1	Insulator	Refer TO:2302461-3, Color: Blue	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED					
	PART DESCRIPTION: 2302510-9 female 2302461-3 male cable				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd: Gavin	P/N: 104-12-10011-150			
	Check:	Date	Scale	Unit	Type
	Draw: YYX	2024.08.13	Free	MM	Z
					Page 1/1