

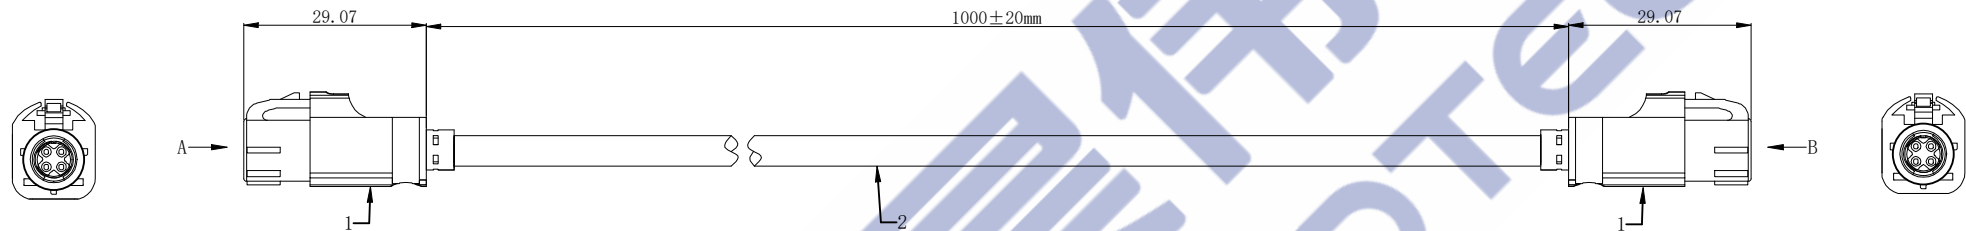


| | | | | |
|-------------|-------------|--------------|------------|----------|
| Product NO. | | RHT-605-6414 | | |
| REV | DESCRIPTION | DWN | DATE | APPROVEN |
| R1.0 | First issue | YYX | 2024/08/07 | Gavin |



P1:HSD 4PIN FEMALE
K CODE
Curry

P2:HSD 4PIN FEMALE
K CODE
Curry



Pin Assignment

| P1:HSD Female | Color | P2:HSD Female |
|---------------|--------|---------------|
| 4 | Blue | 1 |
| 3 | Orange | 2 |
| 2 | Green | 3 |
| 1 | Brown | 4 |
| Shell | Braid | Shell |

| | | | |
|----|-----------|--|-----|
| 2 | Cable | 7/0.16TC*1.2C+4C+MY+AL+128/0.1TC; jacket:PVC, Black, OD4.5 | 1 |
| 1 | Connector | HSD FEMALE, K CODE, Colour:Curry | 2 |
| NO | PART NAME | DESCRIPTION | QTY |

| | | | | | |
|---|--|--|-------|------|------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | RENHOTEC GROUP | | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm | | PART DESCRIPTION: HSD K Female to HSD K Female For Cable, 1M, LVDS cable, 50Ω P/N: RHT-605-6414 | | | |
| Appd: Gavin | | Date | Scale | Unit | Type |
| Check: | | 2024/08/07 | Free | MM | Z |
| Draw: YYX | | | | | 1/1 |