




|             |             |              |            |          |
|-------------|-------------|--------------|------------|----------|
| Product NO. |             | RHT-605-6201 |            |          |
| REV         | DESCRIPTION | DWN          | DATE       | APPROVEN |
| R1.0        | FIRST ISSUE | YYX          | 2024.08.06 | Gavin    |

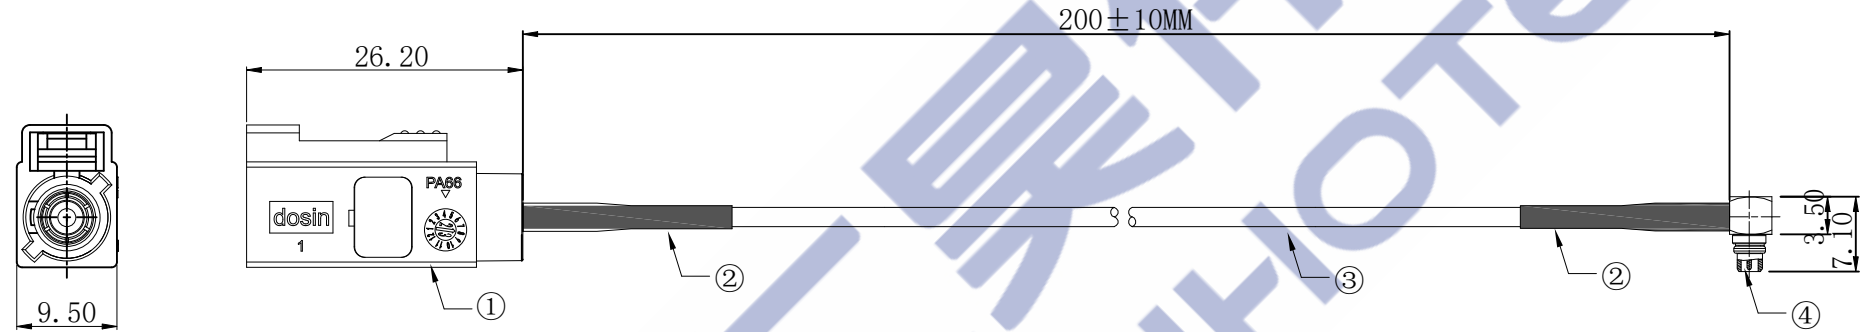

Fakra JACK  
C Code  
Blue

**Specifications:**

Impedance:50 Ohms  
Frequency Range:DC~3G  
VSWR:1.5MAX  
Working Voltage:335V rms sea level  
Temperature Range:-20°C To +80°C

|  |  |                   |       |      |       |
|--|--|-------------------|-------|------|-------|
| -TOLERANCES-<br>UNLESS OTHERWISE<br>SPECIFIED  | <b>RENHOTEC GROUP</b>  |                   |       |      |       |
|  | PART DESCRIPTION: MMCX male to Fakra C code<br>Female for RG179 cable,20cm, 50 Ω |                   |       |      |       |
| UNLESS OTHERWISE SPECIFIED<br>TOLE RANCES FOR MILLIMETERS<br>ARE:<br>0.5 - 8mm ± 0.20mm<br>8 - 30mm ± 0.25mm<br>30 -120mm ± 0.30mm | Appd: Gavin  | P/N: RHT-605-6201 |       |      |       |
|  | Check:   | Date              | Scale | Unit | Type  |
|  | Draw: YYX  | 2024.08.06        | Free  | MM   | Z 1/1 |

|    |                 |                 |                                      |     |
|----|-----------------|-----------------|--------------------------------------|-----|
| 4  | R/A MMCX PLUG   | RHT-617-0310    | Brass , Gold Plating                 | 1   |
| 3  | CABLE           | CA-605-6201     | RG179, Jacket:FEP Brown OD:2.5±0.1mm | 1   |
| 2  | HOT SHRINK TUBE | 9-010302002     | Black L=20mm                         | 2   |
| 1  | Fakra JACK      | DS1-0103F0001-A | Brass , Nickel plating               | 1   |
| NO | PART NAME       | P/N             | DESCRIPTION                          | QTY |