




| | | | | |
|-------------|-------------|--------------|------------|----------|
| Product NO. | | RHT-605-6204 | | |
| REV | DESCRIPTION | DWN | DATE | APPROVEN |
| R1.0 | FIRST ISSUE | YYX | 2023.07.29 | Gavin |

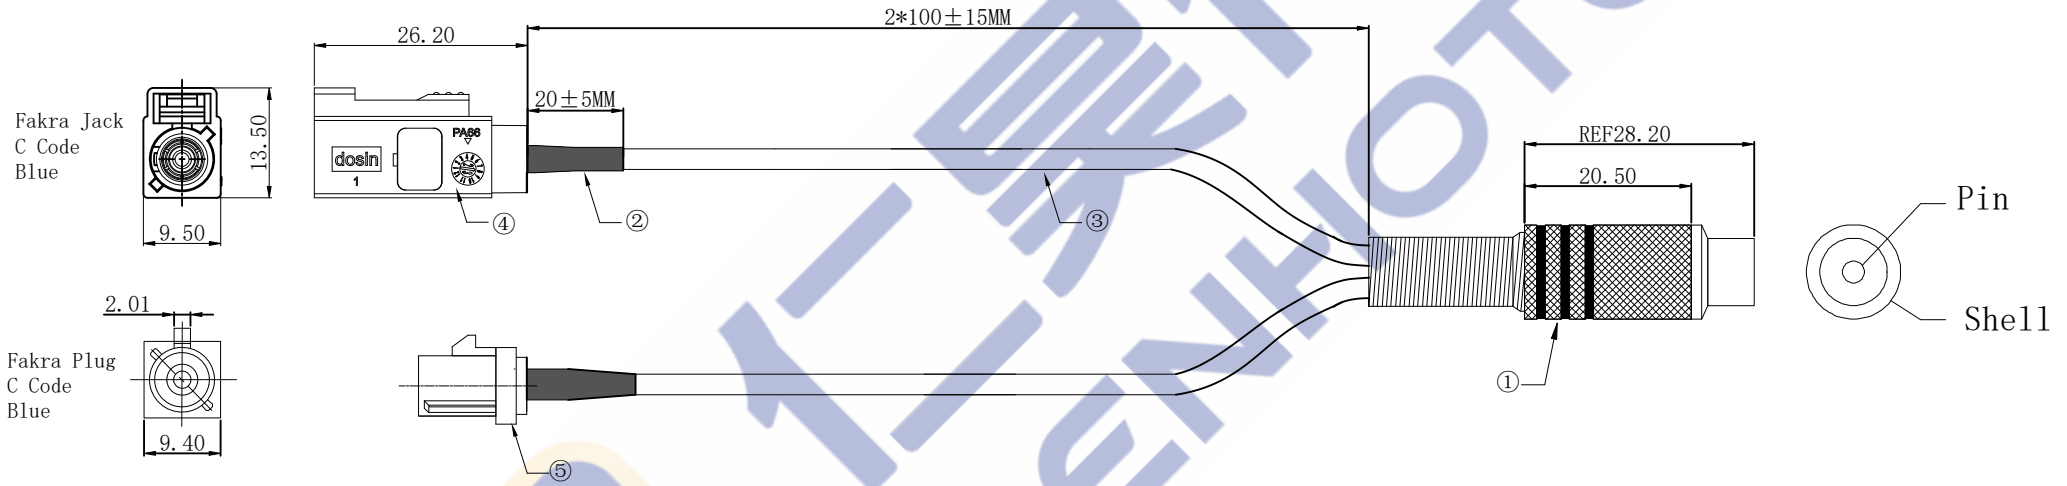

Specifications:
 Impedance:50 Ohms
 Frequency Range:DC~3G
 VSWR:1.5MAX
 Working Voltage:335V rms sea level
 Temperature Range:-20℃ To +80℃

| | | |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | RENHOTEC GROUP | |
| | PART DESCRIPTION: Fakra C code female & Male to RCA female TO RG174 cable,10cm, 50Ω | |
| UNLESS OTHERWISE SPECIFIED TOLE RANCES FOR MILLIMETERS ARE: | Appd: Gavin | P/N: RHT-605-6204 |
| | Check: | Date: 2024.07.29 |
| 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm | Draw: YYX | Scale: Free |
| | | Unit: MM |
| | | Type: Z |
| | | Page: 1/1 |

| NO | PART NAME | P/N | DESCRIPTION | QTY |
|----|-----------------|-----------------|--------------------------------------|-----|
| 5 | Fakra PLUG | RHT-698-Q216 | Brass , Nickel plating | 1 |
| 4 | Fakra JACK | DS1-0103F0001-A | Brass , Nickel plating | 1 |
| 3 | CABLE | CA-605-6192 | RG174, Jacket:PVC BLACK OD:2.8±0.1mm | 2 |
| 2 | HOT SHRINK TUBE | 9-010302001 | Black L=20mm | 1 |
| 1 | RCA JACK | | Brass ,Gold plated | 1 |